


UNIVERSAL OPENING FURNACE 1300°C for tests machines and other applications

This range of openwork furnaces can be integrated into all mechanical test machines, allowing continuous operation at temperatures up to 1300°C. Thanks to its double hinge support adjustable in height, the furnace can be easily handled by the user during sample assembly/disassembly on the load column, cold testing, calibration or maintenance.

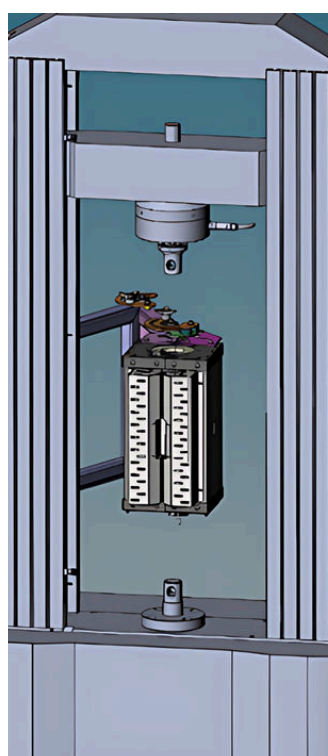

AET
TECHNOLOGIES

ABOUT US

AET Technologies is the European leader on the hot mechanical testing market.

Our engineering know-how concerning heating and mechanical transfer, management of gases-atmospheres as well as vacuum, automatisms and regulation allows us to give you a perfect answer adapted to your needs.

Autonomous or integrated furnaces, dedicated to production or to R&D, we deliver turnkey equipment, thanks to unique engineering and recognized experience.

David D'ATTOMA
Chief Sales Officer



**Compact and
comprehensive equipment**

Thanks to its small footprint, this furnace is suitable for all testing machine on the market. It is compatible with axial and transverse contact extensometers.



**Standards for hot
mechanical testing**

This furnace meets the requirements of various hot mechanical testing standards (creep, tension, compression).



**Removable heating
elements**

Lanthanum chromite heating elements can be replaced without disassembly of the load column thus insuring test continuity.



Let's innovate together to reinvent
today's materials and discover
tomorrow's.

AET GROUP

73D rue Général Mangin
38100 Grenoble - FRANCE

sales@aet.group
+33 (0)4 76 90 41 18

UNIVERSAL OPENING FURNACE 1300°C

for tests machines and
other applications



Made in
France



After-sales
service



Recognition
of excellence



Key elements

DOUBLE-HINGED OVEN SUPPORT WITH INDEPENDENT ADJUSTMENT

Frees up working space (load columns) for cold testing and specimen instrumentation.

SUITABLE FOR ALL MECHANICAL TESTING MACHINES

Can be installed on electromechanical or dynamic testing machines.

EXTENSOMETER PASSAGE

Compatible with contact extensometers: axial or transverse mounting.

INNOVATIVE TECHNOLOGY

The result of unique R&D work, lanthanum chromite technology is the property of AET Technologies.

100% NON-CARCINOGENIC MATERIALS

Eliminates the risk of user exposure to a hazardous dangerous substance (Directive 97/69/EC).

Technical specifications

- 1300°C continuous (1500°C on request)
- Maximum heating speed 20°C/min
- Regulation stability <2°C
- Natural cooling speed
- Compatible with axial contact extensometer
- Load column opening: Ø60 mm
- Power: 4kW or 6.5kW
- Temperature control on the furnace or on the test piece
- 3 heating zones controlled by setpoint offset
- HMI interface: 7-inch colour touch screen
- Ethernet connection TCP/IP

PRODUCT	Usable area size (L x W) mm	Heated height uniform (mm)	Heated height (mm)	Height overall (mm)	Width closed furnace (mm)	Minimum width open furnace (mm)*	Supply voltage (V)	Power (kW)
FUO-1300-250-75	75x75	90	250	360	260	355	230 ou 400	4 or 6.5
FUO-1300-310-75	75x75	150	310	420	260	355	230 ou 400	4 or 6.5
FUO-1300-310-120	120x120	110	330	420	340	420	230 ou 400	4 or 6.5
FUO-1300-370-120	120x120	170	390	480	340	420	230 ou 400	4 or 6.5

*Cross-section dimensions for 20° opening angle. Opening 90° max.



Let's innovate together to reinvent
today's materials and discover
tomorrow's.

AET GROUP

73D rue Général Mangin
38100 Grenoble - FRANCE

sales@aet.group
+33 (0)4 76 90 41 18